




ArcelorMittal

Amstrong® Ultra

The smartest choice

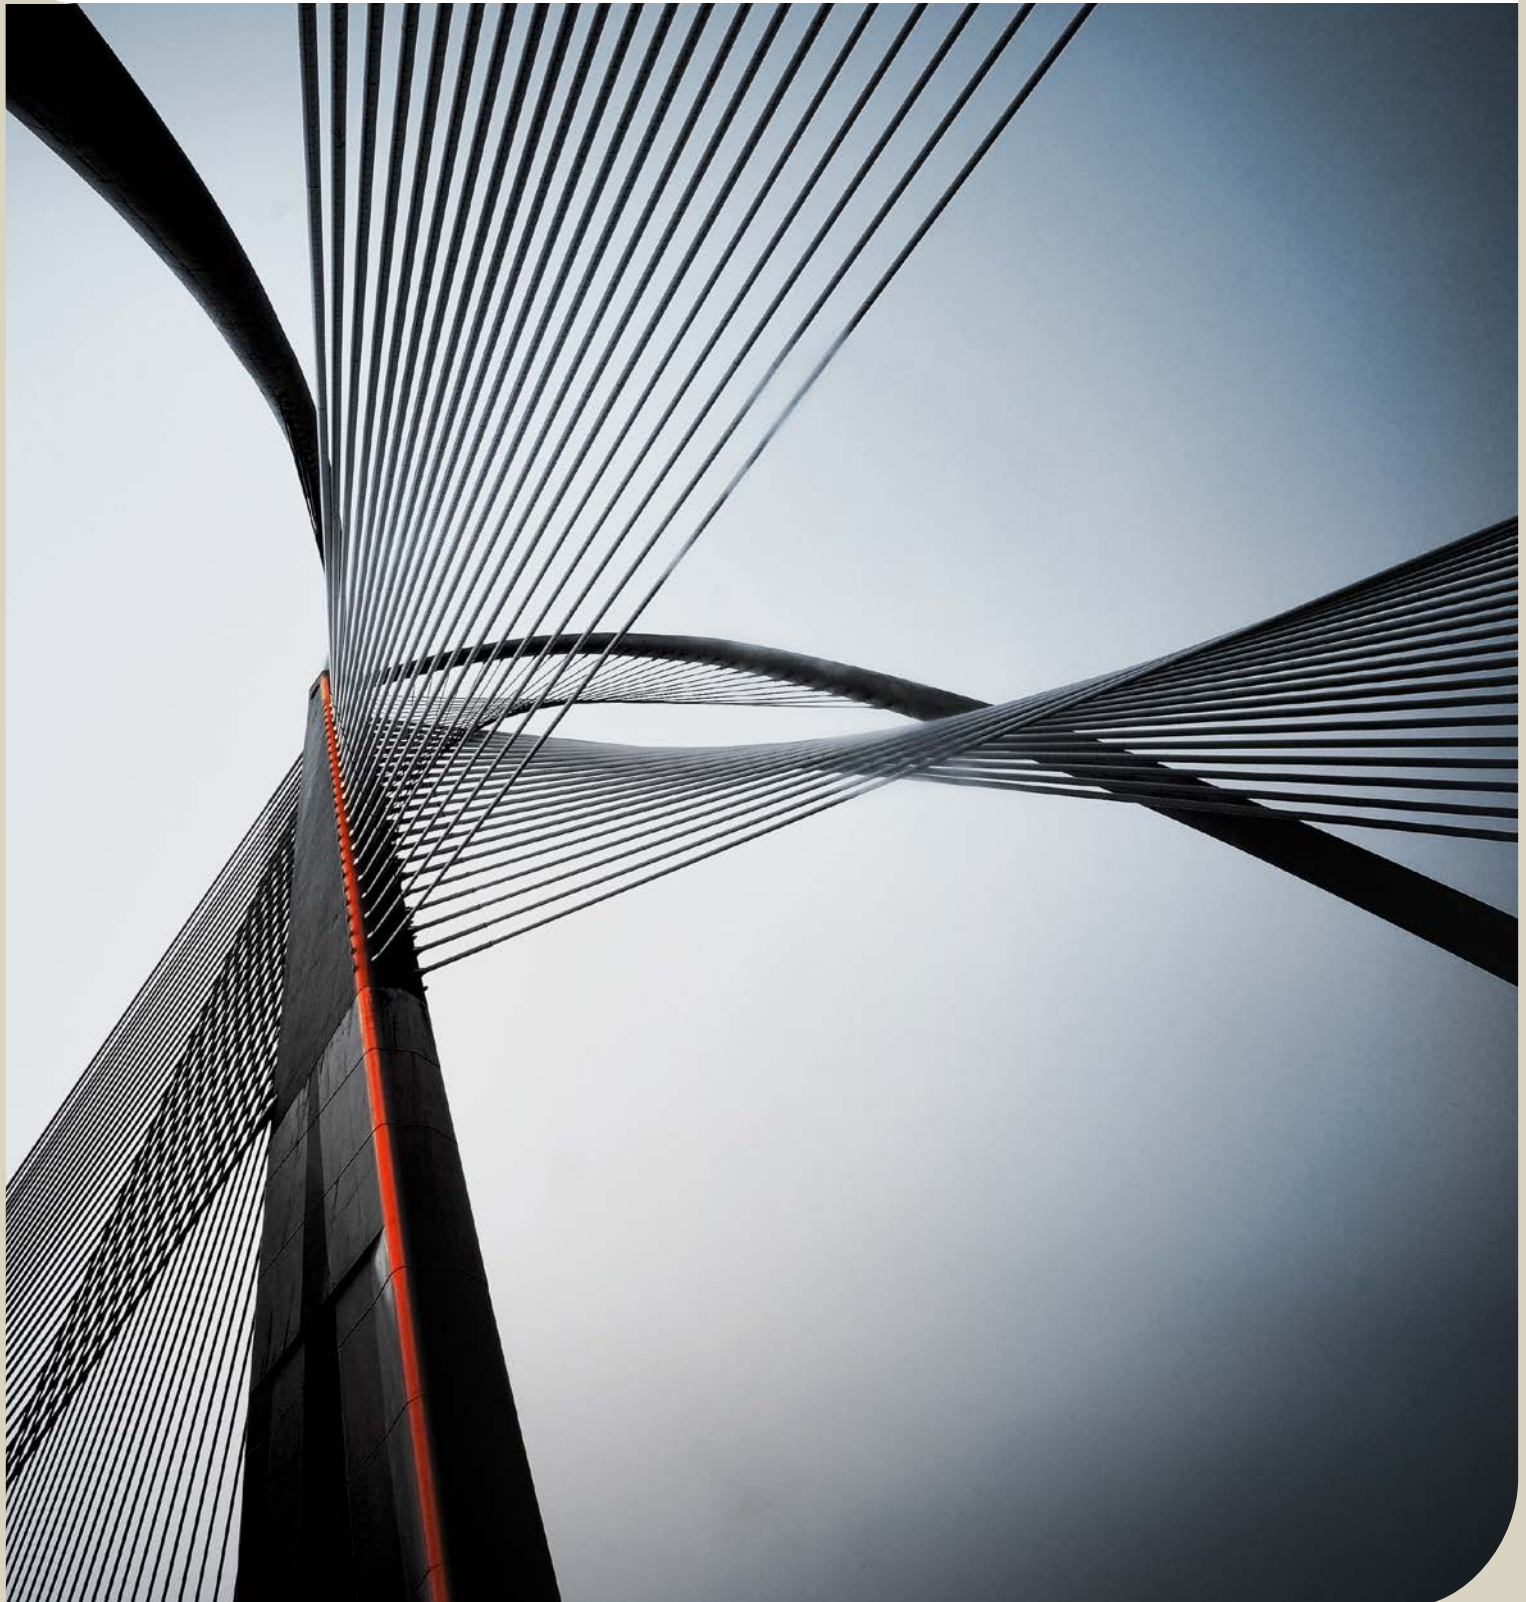

# The smartest choice

ArcelorMittal's Armstrong® Ultra high-strength steels combine **excellent formability** with **toughness at low temperature** and **fatigue resistance**. These high-strength steel grades have minimum yield strengths ranging from 650 up to 1100 MPa. The Armstrong® Ultra series are available as thermomechanically rolled coils, sheets/plates or as quenched and tempered sheets and quarto plates.

## Advantages of Armstrong® Ultra

Developed for structural applications, Armstrong® Ultra grades are an excellent alternative to conventional structural steels in the 350 MPa yield strength range. They enable manufacturers to **reduce steel thickness** and **weight to improve payload** and **reduce fuel consumption** in mobile equipment. Armstrong® Ultra grades also allow the development of **longer crane booms** and **enhance wear resistance**. Replacing traditional structural steels with Armstrong® Ultra grades provides **significant material cost savings** while maintaining good fabrication properties as formability and weldability.

The weldability of Armstrong® Ultra grades is enhanced due to the reduction in carbon and other alloying elements.

## A portfolio of ultra high strength steel products

Armstrong® Ultra high-strength steel grades meet or **exceed** the requirements of applicable **European standards**. Please contact us if different specifications are required.



Trailer part made of 12 mm Armstrong® Ultra 700MC, laser cut and bent



Thermo-mechanical grades	Standard
Armstrong® Ultra 650MC	EN 10149-2:2013 – Meets all requirements of S650MC with tighter chemistry and better guarantees on mechanical properties in both the longitudinal and transverse directions. Toughness guarantee at -20°C in the longitudinal direction.
Armstrong® Ultra 650MCT	EN 10149-2:2013 – Meets all requirements of S650MC with tighter chemistry and better guarantees on mechanical properties in both the longitudinal and transverse directions. Toughness guarantee at -40°C in the longitudinal direction.
Armstrong® Ultra 700MC	EN 10149-2:2013 – Meets all requirements of S700MC with tighter chemistry and better guarantees on mechanical properties in both the longitudinal and transverse directions. Toughness guarantee at -20°C in the longitudinal direction.
Armstrong® Ultra 700MCT	EN 10149-2:2013 – Meets all requirements of S700MC with tighter chemistry and better guarantees on mechanical properties in both the longitudinal and transverse directions. Toughness guarantee at -40°C in the longitudinal direction.
Armstrong® Ultra 700MCL	EN 10149-2:2013 – Meets all requirements of S700MC with tighter chemistry and better guarantees on mechanical properties including toughness at -40°C and bendability, all in both the longitudinal and transverse directions.
Armstrong® Ultra 900MCL	EN 10149-2:2013 – Meets all requirements of S900MC with tighter chemistry and better guarantees on mechanical properties including toughness at -40°C and bendability, all in both the longitudinal and transverse directions.
Armstrong® Ultra 960MCL	EN 10149-2:2013 – Meets all requirements of S960MC with tighter chemistry and better guarantees on mechanical properties including toughness at -40°C and bendability, all in both the longitudinal and transverse directions.
Quenched and tempered grades	Standard
Armstrong® Ultra 690	EN 10025-6 – S690Q, S690QL and S690QL1
Armstrong® Ultra 890	EN 10025-6 – S890Q, S890QL and S890QL1
Armstrong® Ultra 960	EN 10025-6 – S960Q and S960QL
Armstrong® Ultra 1100	Grade produced as per Industeel technical data sheet

For further detailed information on our grades, please consult our online product data sheets at:

[industry.arcelormittal.com](http://industry.arcelormittal.com) for thermo-mechanical grades  
[industeel.arcelormittal.com](http://industeel.arcelormittal.com) for quenched and tempered grades

# Mechanical properties

## Amstrong® Ultra – Thermomechanical grades

	Thickness range (mm)	Testing direction	Min. yield strength $R_{eH}$ (MPa) <sup>1, 4</sup>	Tensile strength $R_m$ (MPa)	Min. elongation A $l_0 = 80$ mm (%) ( $t < 3$ mm) <sup>2</sup>	Min. elongation A $l_0 = 5.65\sqrt{S_0}$ (%) ( $t \geq 3$ mm) <sup>2</sup>	Min. inner radius for 90° bending (mm) <sup>2</sup>	Min. mandrel diameter for 180° bending (mm) <sup>2</sup>	Min. impact toughness KV at -20°C (J) <sup>3</sup>	Min. impact toughness KV at -40°C (J) <sup>3</sup>
Amstrong® Ultra 650MC	2 – 12	L	650	700-850	10	14	-	-	40	-
		T	670	710-880		12	0.9 x t	1.8 x t	-	-
Amstrong® Ultra 650MCT	2 – 12	L	650	700-850	10	14	-	-	40	27
		T	670	710-880		12	0.9 x t	1.8 x t	-	-
Amstrong® Ultra 700MC	2 – 12	L	700	750-930	10	14	-	-	40	-
		T	720	760-950		12	0.9 x t	1.8 x t	-	-
Amstrong® Ultra 700MCT	2 – 12	L	700	750-930	10	14	-	-	40	27
		T	720	760-950		12	0.9 x t	1.8 x t	-	-
Amstrong® Ultra 700MCL	6 – (12)	L	700	750-930	-	14	0.9 x t	1.8 x t	40	30
		T	720	760-950	-	12				27
Amstrong® Ultra 900MCL	3 – 6	L	900	930-1200	-	8	3.0 x t	6.0 x t	40	27
		T			-	6				
Amstrong® Ultra 960MCL	3 – 6	L	960	980-1250	-	8	3.0 x t	6.0 x t	40	27
		T			-	6				

<sup>1</sup> For grades with a minimum nominal yield strength of 650 and 700 MPa and thicknesses > 8 mm, minimum yield strength can be 20 MPa lower.

<sup>2</sup> t = Nominal thickness

<sup>3</sup> The impact energy is verified for products with a nominal thickness of  $\geq 6$  mm as defined in the relevant EN standard.

<sup>4</sup> If a yield phenomenon is not present, the 0,2 % proof strength ( $R_{p0,2}$ ) shall be determined.

■ Grades under development

## Amstrong® Ultra – Quenched and tempered plates

	Thickness range (mm)	Min. yield strength $R_{eH}$ (MPa)	Tensile strength $R_m$ (MPa)	Min. elongation A $l_0 = 5.65\sqrt{S_0}$ (%)	Min. inner radius for 90° bending $\perp$ to rolling direction <sup>1</sup> (mm)	Min. die opening for 90° bending $\perp$ to rolling direction <sup>1</sup> (mm)	Grade Q Min impact toughness KV-20°C (J) L/T	Grade QL Min impact toughness KV-40°C (J) L/T	Grade QL1 Min impact toughness KV-60°C (J) L/T
Amstrong® Ultra 690	4-50	690	770-940	14	2 x t	8 x t	50/35	40/30	30/27
	51-100	650	760-930		-	-			
	101-250	630	710-900		-	-			
Amstrong® Ultra 890	5-50	890	940-1100	11	2.5 x t	8.5 x t	50/35	40/30	30/27
	51-100	830	880-1100		-	-			
	101-120	830	880-1100		-	-			
Amstrong® Ultra 960	5-50	960	980-1150	10	2.5 x t	10 x t	40/30	30/27	-
	51-105	900	940-1100		-	-			
Amstrong® Ultra 1100	8-15	1100	1250-1450	10	4 x t	10 x t	40/30	30/27	-

<sup>1</sup> t = Nominal thickness

Supplementary technical information is available in our online data sheets at [industeel.arcelormittal.com](http://industeel.arcelormittal.com)



## Dimensional feasibility

Product	Min width (mm)	Length (mm)	Max width (mm) per thickness (mm)																		
			2	3	4	5	6	7	8	9	10	11	12	15	25	50	105	150	250		
Amstrong® Ultra 650MC/650MCT	Coil or cut to length sheet/plate	800	For sheet 800 to 12000		1520	1620	1720	1780	1850	2020		2040	2050								
Amstrong® Ultra 700MC/700MCT				1250	1520	1620	1720	1780	1850	2020		2040	2050								
Amstrong® Ultra 700MCL								1500													
Amstrong® Ultra 900MCL*																					
Amstrong® Ultra 960MCL*																					
Amstrong® Ultra 690Q, QL, QL1	Cut to length sheet/plate	1200	4000 to 13000			2000															
Amstrong® Ultra 890Q, QL, QL1						2000															
Amstrong® Ultra 960Q, QL						2000															
Amstrong® Ultra 690Q, QL, QL1	Quarto plate	1200	4000 to 13000			2000		2500		3100		3800		3680		3500					
Amstrong® Ultra 890Q, QL, QL1								2500				3000									
Amstrong® Ultra 960Q, QL								2500				3000									
Amstrong® Ultra 1100								2500													

■ Contact us for feasibility  
\* Product in development

## Availability

Amstrong® Ultra products are manufactured in ArcelorMittal's European mills. Our strong distribution network across Europe and globally ensures products can be delivered to your doorstep with short lead times wherever your operations are located. The supply chain is complemented by our technical and commercial teams who are always available to answer any requests, and in your language.

As ArcelorMittal operates a policy of continuous development, our product range is constantly changing. For the latest information on dimensional feasibility, we strongly advise you to check the latest version of our leaflet or the product data sheet, both of which are available from our website. Your account manager also has the latest information.





# Applications

Amstrong® Ultra high-strength steels can be used in a wide range of applications for sectors including transport, yellow and green goods, and mechanical engineering. Typical applications include: trucks and tippers, mobile cranes, crawler cranes, crane booms, work tools for demolition, livestock pens, machine frames, offshore cranes, heavy mechanical equipment and bucket parts.

## Transport: Creating the lighter, durable, and fuel efficient vehicles of tomorrow

Lighter design translates into lower costs for materials, easier fabrication, and better payload capacity. Simultaneously it reduces fuel consumption and the CO<sub>2</sub> footprint of your products and operations. Use Armstrong® Ultra in the design of your vehicle trailer or tipper chassis and achieve:

- Significant weight reduction compared to structural steels
- Less welding passes, saving on time and consumables
- Innovative design.

Switch to Armstrong® Ultra 700MC for your towbar fabrication and achieve a 40% weight reduction compared to structural steels. Moving from a welded to a bent structure reduces costs by more than 25%.

## Yellow and green goods: Smarter design improves performance

Increase the threshing capacity of your corn harvester with Armstrong® Ultra 700MC. Not only can you achieve a 35% weight reduction, the cutting head can be expanded from 8 to 12 rows. The lower weight and increased capacity reduces fuel consumption significantly during use.

## Mechanical engineering: Lighter, longer, and more powerful cranes

The Armstrong® Ultra MCL and QL series have been designed to meet the stringent toughness and fatigue resistance requirements of telescopic crane booms and chassis. Reducing the weight of the application with Armstrong® Ultra MCL or QL will allow for longer booms, or a higher loading capacity.



**ArcelorMittal Europe – Flat Products**  
24-26, boulevard d'Avranches  
L-1160 Luxembourg  
Luxembourg  
flateurope.technical.assistance@arcelormittal.com  
[industry.arcelormittal.com/amstrongultra](http://industry.arcelormittal.com/amstrongultra)



**Industeel**  
266 rue de Châtelet  
B-6030 Charleroi  
Belgium  
contact.industeel@arcelormittal.com  
[industeel.arcelormittal.com](http://industeel.arcelormittal.com)

## **ArcelorMittal Europe – Flat Products**

24-26, boulevard d'Avranches  
L-1160 Luxembourg  
Luxembourg

[flateurope.technical.assistance@arcelormittal.com](mailto:flateurope.technical.assistance@arcelormittal.com)  
[industry.arcelormittal.com/amstrongultra](http://industry.arcelormittal.com/amstrongultra)

## **Industeel**

266 rue de Châtelet  
B-6030 Charleroi  
Belgium

[contact.industeel@arcelormittal.com](mailto:contact.industeel@arcelormittal.com)  
[industeel.arcelormittal.com](http://industeel.arcelormittal.com)

## **Credits**

Pictures:

cover: © AzriSuratmin, istockphoto.com,

adapted by Philippe Vandenameele

Jeroen Op de Beeck

© Shutterstock – Dmitry Kalinovsky, Fotokostic, Salva

G C, dragunov, Standret, eastvanfran

## **Copyright**

All rights reserved. No part of this publication may be reproduced in any form or by any means whatsoever, without prior written permission from ArcelorMittal.

Care has been taken to ensure that the information in this publication is accurate, but this information is not contractual. Therefore ArcelorMittal and any other ArcelorMittal Group company do not accept any liability for errors or omissions or any information that is found to be misleading. As this document may be subject to change at any time, please consult the latest information in the product document centre at [industry.arcelormittal.com](http://industry.arcelormittal.com)